


This small expander will allow you to use typical wired detectors in the system and control wired devices.

- 4,8 programmable inputs :
 - support for NO and NC type detectors
 - support EOL and 2EOL configurations
- 4,8 OC type output
- power supply 12 V DC

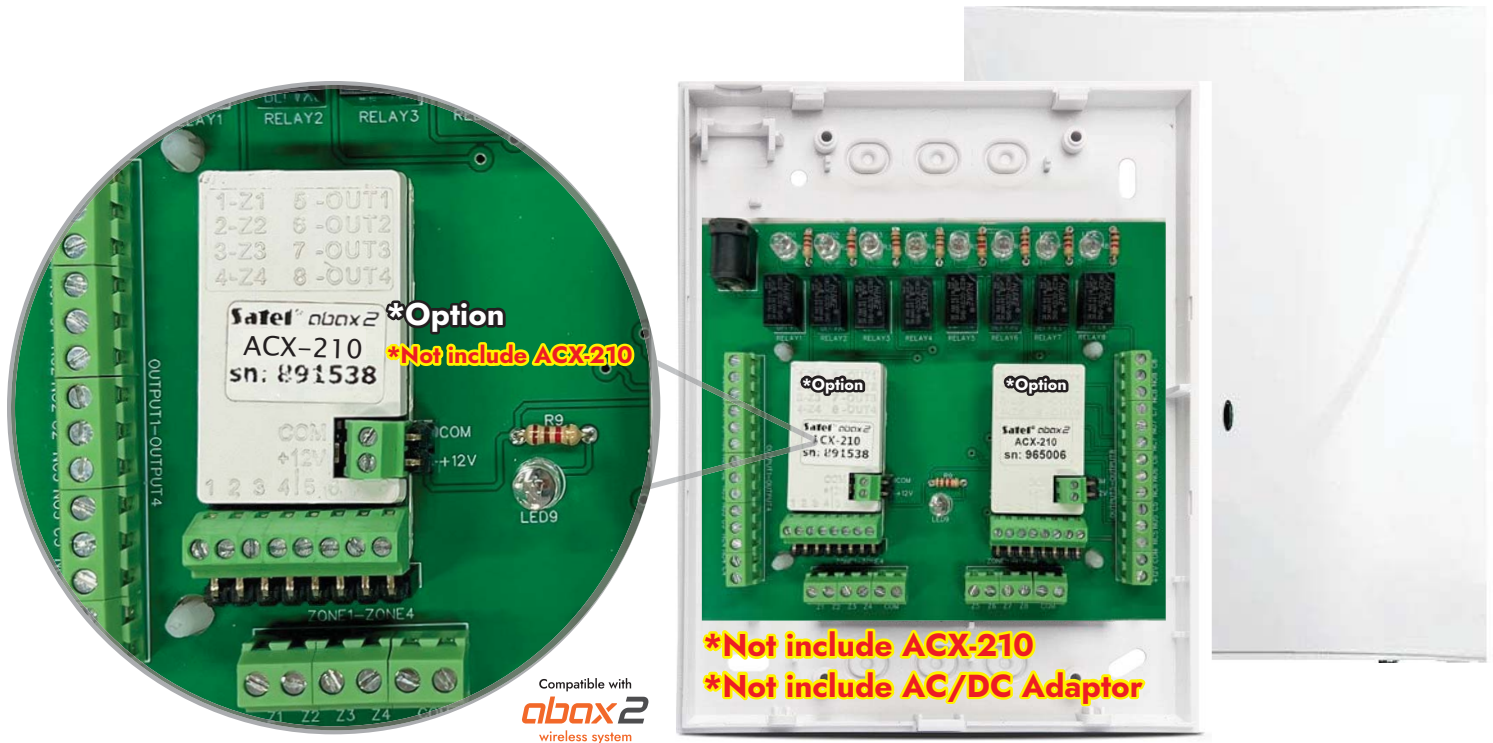

Operating frequency band	868.0 MHz ÷ 868.6 MHz
Radio communication range (in open area)	up to 1400 m
Supply voltage	12 V DC
Standby mode current consumption	30,60 mA
Maximum current consumption	35,70 mA
Relay output (resistive load) NC,NO	2000 mA / 24 V DC
Sensitivity	10ms - 5000ms
Impulses Time	30s,120s,240s,To Disarm
Impulses Count	1-8 Count
Complied with standards	EN 50130-4, EN 50130-5
Environmental class according to EN50130-5	II
Operating temperature range	-10°C...+55°C
Maximum humidity	93±3%
Dimensions	126 x 158 x 32 mm